

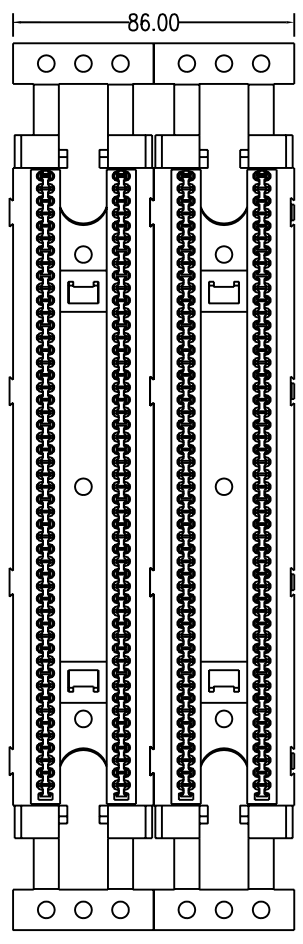


| REVISIONS |     |             |      |          |
|-----------|-----|-------------|------|----------|
| ZONE      | REV | DESCRIPTION | DATE | APPROVED |
|           | 1   |             |      |          |
|           | 2   |             |      |          |
|           | 3   |             |      |          |


110 termination kits combine category 5e performance with unparalleled installation features. Each kit includes adequate connecting blocks to complete each 25-pair termination strip on the 100 wiring block.

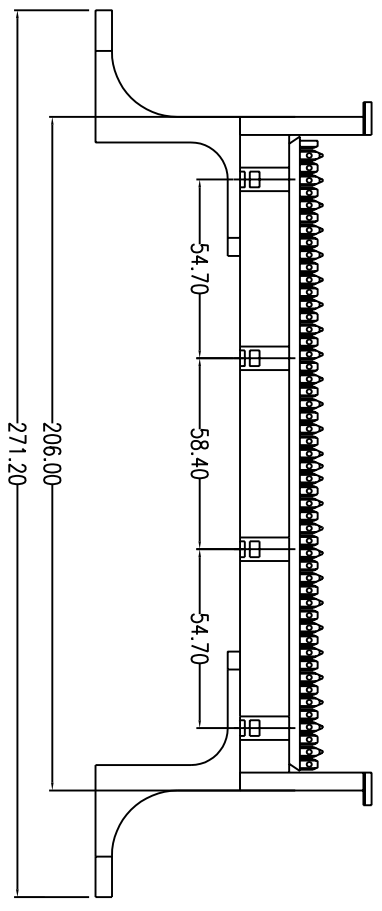

110BW100 X 1 PCS



84.40

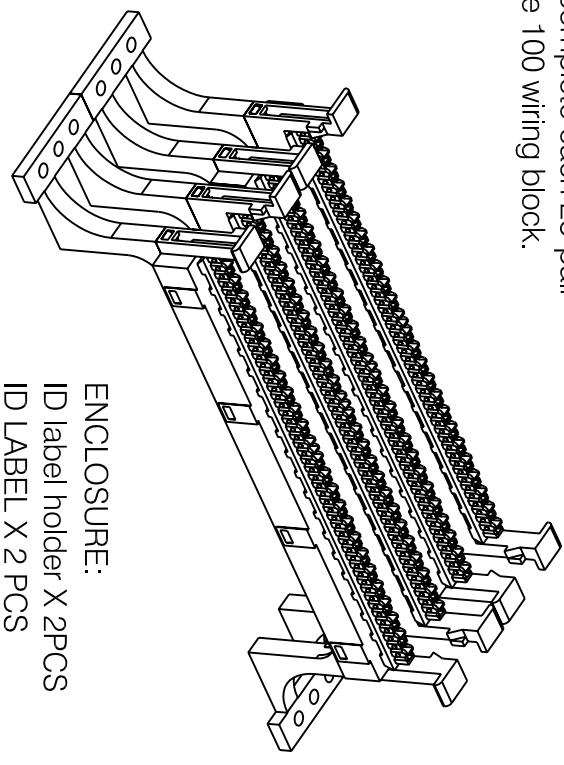


**ENCLOSURE:**

ID label holder X 2PCS  
ID LABEL X 2 PCS


**MATERIAL:**

PLASTIC : PC UL94V-0  
Temperature : -40°C ~ 70°C  
Humidity : 10% ~ 90% RH

Cat 5e  
UL CERTIFIED  US LISTED  
ACCORDING TO TIA/EIA-568-B-2  
REQUIREMENTS  
FILE NO.E145249

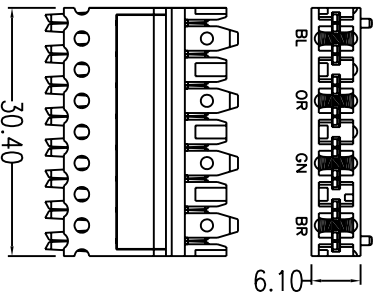

110C8 X 20 PCS

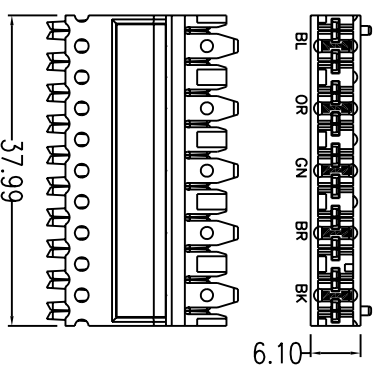

110C10 X 4 PCS

IDC plastic: PC, UL 94V-0  
IDC block: 200 termination cycles  
IDC contact: Phosphor Bronze with 200u" Tin over 100u" Nickel undercoat

| COMMON TOLERANCE |       | SHEET  | OF         | ALL COPY RIGHTS RESERVED           |         |
|------------------|-------|--------|------------|------------------------------------|---------|
| CLASS            | A     | SIZE   | A4         | DCE DAN-CHIEF ENTERPRISE CO., LTD. |         |
| DIMENSION        |       | DIA    | mm         | TITLE                              |         |
| L <= 3           | ±0.05 |        |            | 110KBW1H4                          |         |
| 3 < L <= 6       | ±0.05 | SCALE  | 2:5        | DRAWING NO.                        | OID-15  |
| 6 < L <= 16      | ±0.1  | DATE   | 2003.10.13 | DRAWN                              | CHECKED |
| 16 < L <= 30     | ±0.1  | DESIGN |            |                                    |         |
| 30 < L <= 120    | ±0.15 |        |            |                                    |         |
| 120 < L <= 315   | ±0.2  |        |            |                                    |         |