

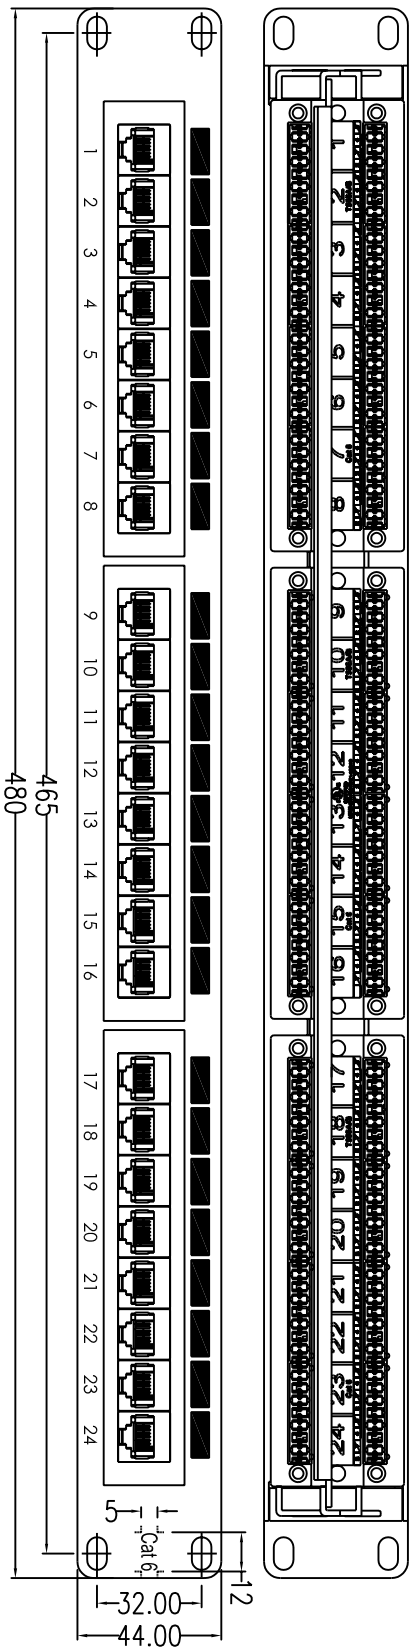
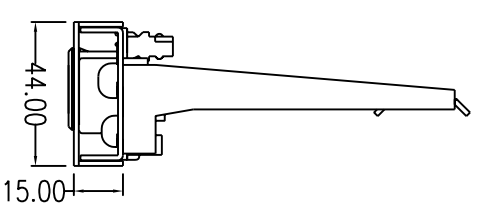


REVISIONS			
ZONE	REV	DATE	APPROVED
	A		
	A		

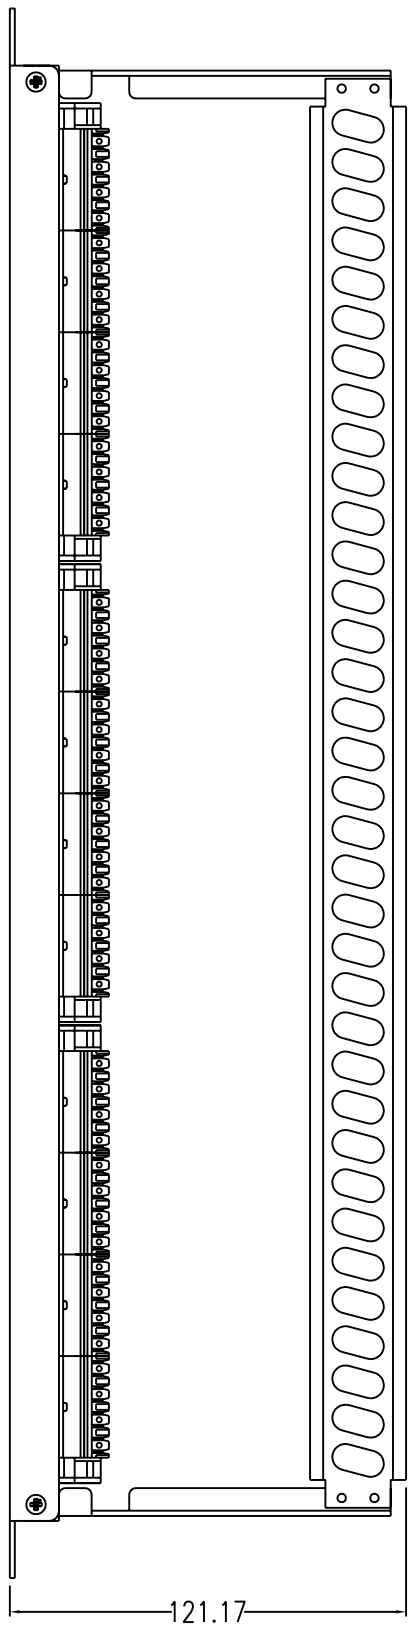

ENCLOSURE:

- CABLE TIE X 6 PCS
- 110T-P X 1 PC
- CAP X 48 PCS

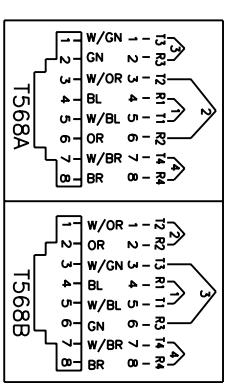

ELECTRICAL

Current rating: 1.5 A
 Voltage: 150V
 Insulation resistance: 500 MOhm
 Contact resistance: 20 mOhm
 DC resistanc: 0.1 Ohm

MATERIAL

Metal Frame: SPCC
 IDC plastic: PC, UL 94V-0
 IDC contact: Phosphor Bronze with 200u" Tin over
 100u" Nickel undercoat
 Spring Wire: Phosphor Bronze with 50u" Gold over
 100u" Nickel undercoat
 Temperature: -40°C ~ 68°C
 Humidity: 10 % ~ 90 % RH
 Modular jack: 750 mating cycles
 Idc block: 200 termination cycles

Cat 6
 UL CERTIFIED



ACCORDING TO TIA/EIA-568-B-2-1
 REQUIREMENTS
 FILE NO. E145249

COMMON TOLERANCE		SHEET OF		ALL COPY RIGHTS RESERVED	
CLASS	A	B	SIZE	A4	TITLE
DIMENSION			DIA	mm	DCE DAN-CHIEF ENTERPRISE CO., LTD. 3012IP4M2XG-F6A
L <= 3	±0.05	±0.1	SCALE	2:5	
3 < L <= 6	±0.05	±0.1	DATE	2004.06.30	
6 < L <= 16	±0.1	±0.15	DESIGN		
16 < L <= 30	±0.1	±0.2	DRAWING NO.	IP-496	DRAWN
30 < L <= 120	±0.15	±0.3	CHECKED		
120 < L <= 315	±0.2	±1			