
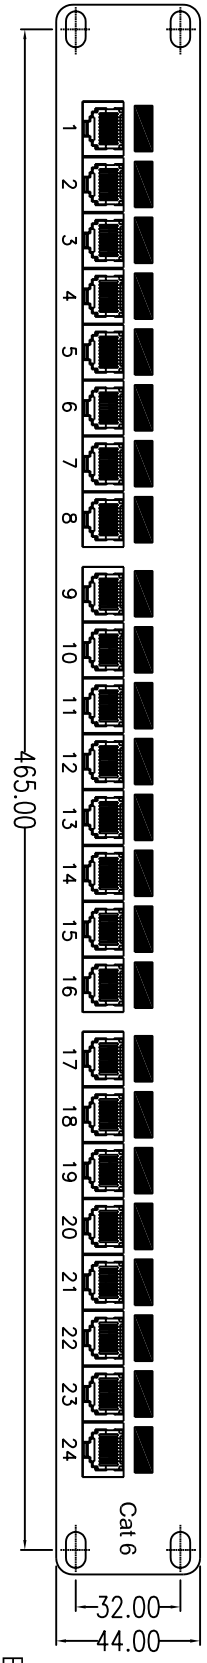


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED
	1			
	2			
	3			

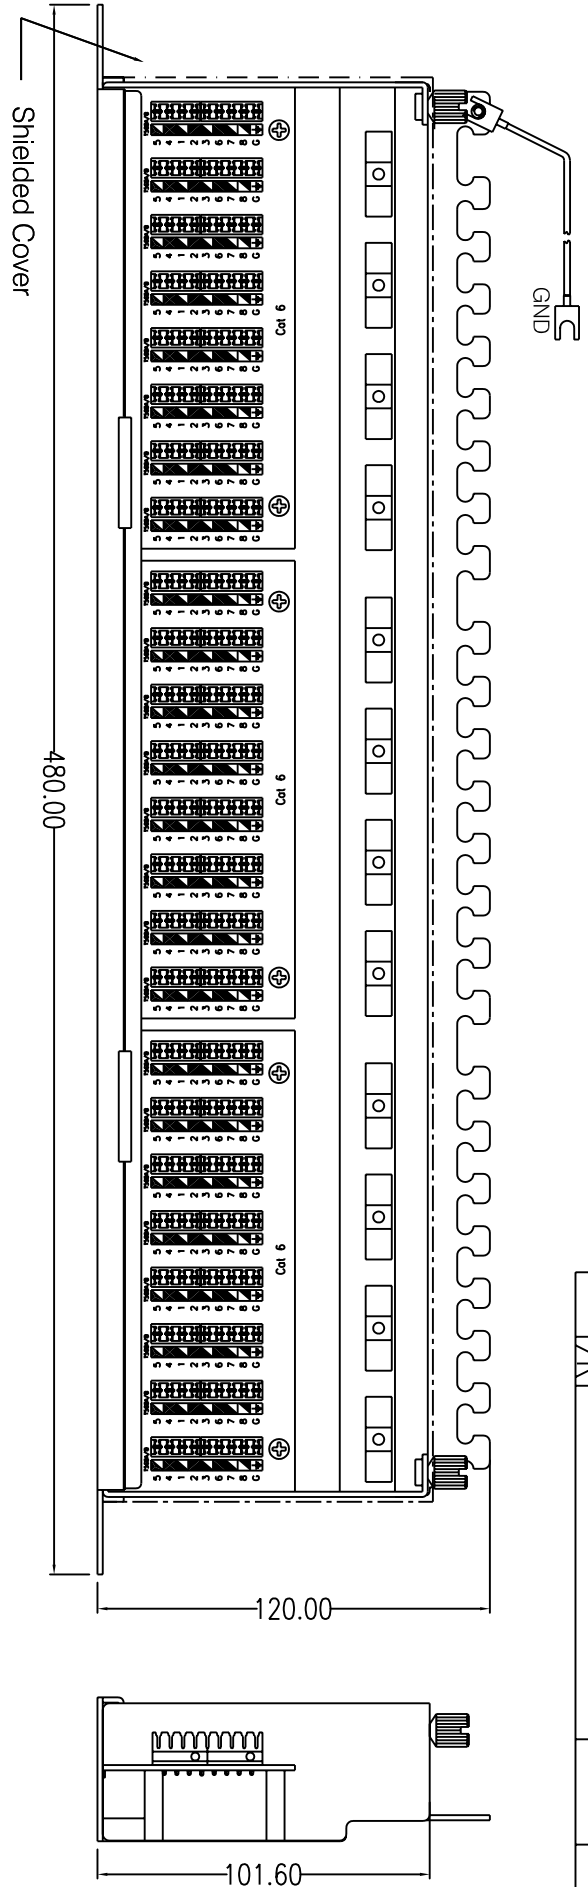

MATERIAL


- Metal Frame: SPCC
- IDC plastic: PC, UL 94V-0
- IDC contact: Phosphor Bronze with 200u" Tin over
- 100u" Nickel undercoat
- Spring Wire: Phosphor Bronze with 50u" Gold over
- 100u" Nickel undercoat
- Temperature: -40°C ~ 68°C
- Humidity: 10 % ~ 90%
- Modular jack: 750 mating cycles
- Idc block: 200 termination cycles
- Shield: Bronze over Nickel

ELECTRICAL

- Current rating: 1.5 A
- Voltage: 150V
- Insulation resistance: 500 MOhm
- Contact resistance: 20 mOhm
- DC resistance: 0.1 Ohm
- Dielectric withstanding voltage: 1000 V

ENCLOSURE:
 CABLE TIE X 24 PCS
 KM-5-A X 1 PCS
 1104 CAP X 24 PCS
 1105 CAP X 24 PCS

Cat 6
 UL CERTIFIED



ACCORDING TO TIA/EIA-568-B-2-1
 REQUIREMENTS
 FILE NO. E145249

COMMON TOLERANCE	SHEET	OF	ALL COPY RIGHTS RESERVED
CLASS	A	B	
DIMENSION	L <= 3	L <= 3	
	3 < L <= 6	3 < L <= 6	
	6 < L <= 16	6 < L <= 16	
	16 < L <= 30	16 < L <= 30	
	30 < L <= 120	30 < L <= 120	
	120 < L <= 315	120 < L <= 315	
	SIZE	A4	
	DIA	mm	
	SCALE	2:5	
	DATE	2004.08.10	
	DESIGN		
	DRAWING NO.	IP-483	
	DRAWN		
	CHECKED		
TITLE			DCE DAN-CHIEF ENTERPRISE CO., LTD.
3012IP-FY248SC6B			