
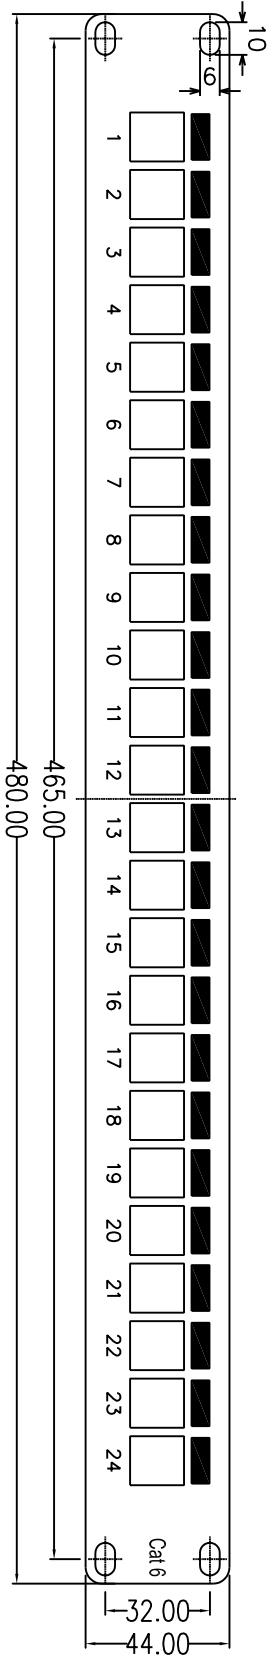


| REVISIONS | | | | |
|-----------|-----|-------------|------|----------|
| ZONE | REV | DESCRIPTION | DATE | APPROVED |
| | 1 | | | |
| | 2 | | | |
| | 3 | | | |
| | 4 | | | |

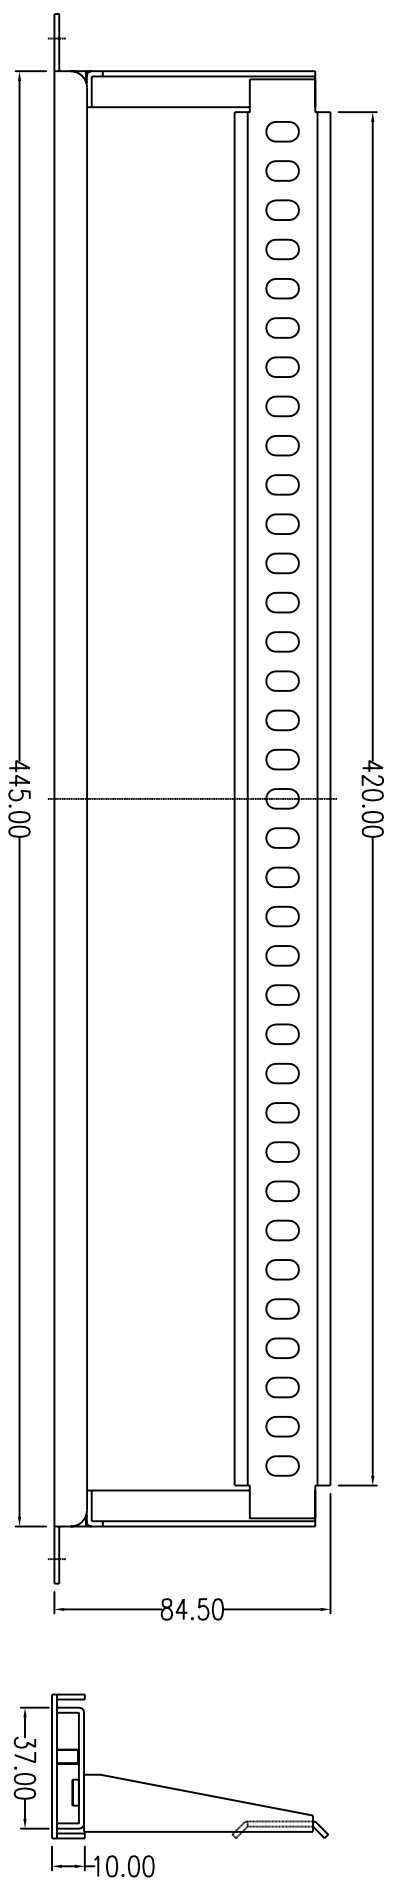

MATERIAL
 Metal Frame: SPCC
 Temperature: -40°C ~ 68°C
 Humidity: 10% ~ 90% RH
 Color: Black

| COMMON TOLERANCE | | SHEET | OF | ALL COPY RIGHTS RESERVED | |
|------------------|-------|---------|------------|------------------------------------|--|
| CLASS | A | SIZE | A4 | DCE DAN-CHIEF ENTERPRISE CO., LTD. | |
| DIMENSION | ±0.05 | DIA | mm | TITLE | |
| L <= 3 | ±0.1 | SCALE | 2:5 | 3012KW-24U-C6 | |
| 3 < L <= 6 | ±0.05 | DATE | 2004.05.18 | DRAWING NO. IP-484 | |
| 6 < L <= 16 | ±0.1 | DESIGN | | DRAWN | |
| 16 < L <= 30 | ±0.1 | CHECKED | | | |
| 30 < L <= 120 | ±0.15 | | | | |
| 120 < L <= 315 | ±0.2 | | | | |