



166.00


70.00

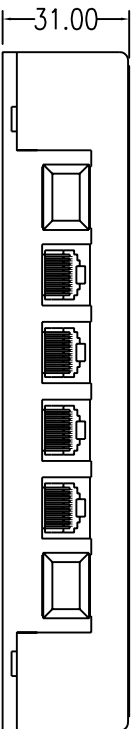

31.00

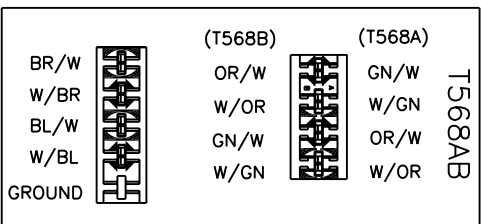

REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED
	1			
	2			
	3			

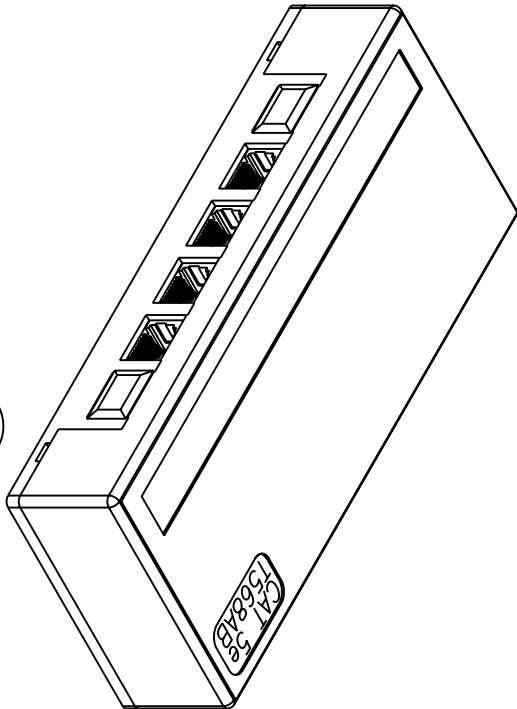


Cat 5e
UL CERTIFIED



ACCORDING TO TIA/EIA-568-B-2
REQUIREMENTS
FILE NO. E145249

ENCLOSURE: 110T-P X 1 PCS
K5 6 X 20mm SCREW X 2
NYLON CABLE TIE X 2
DOUBLE STICKER X 2(55 X 15mm)

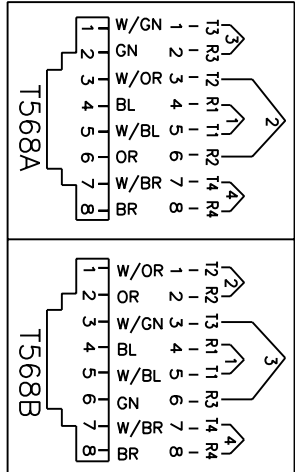

MATERIAL
Housing: ABS, UL 94V-0
IDC plastic: PC, UL 94V-0
IDC contact: Phosphor Bronze with 200u
" Tin over 100u" Nickel undercoat
Spring Wire: Phosphor Bronze with 50u
" Gold over 100u" Nickel undercoat
Temperature: -40°C ~ 68°C
Humidity: 10% ~ 90% RH
Modular jack: 750 mating cycles
Idc block: 200 termination cycles

ELECTRICAL
Current rating: 1.5 Amps
Insulation resistance: 500 MOhm
Contact resistance: 20 mOhm
DC resistanc: 0.1 Ohm
Dielectric withstanding voltage: 1000 V

COMMON TOLERANCE		SHEET OF		ALL COPY RIGHTS RESERVED	
CLASS	A	B	SIZE	A4	TITLE
DIMENSION	±0.05	±0.1	DIA	mm	DCE DAN-CHIEF ENTERPRISE CO.,LTD. 4000-B8-C5eAB-XX-X DRAWING NO. A4-008
L<=3	±0.05	±0.1	SCALE	1:2	
3<L<=6	±0.05	±0.1	DATE	2004.12.30	
6<L<=16	±0.1	±0.15	DESIGN		
16<L<=30	±0.1	±0.2	DRAWN		CHECKED
30<L<=120	±0.15	±0.3			
120<L<=315	±0.2	±1			