



166.00


Cat 5e
T568B

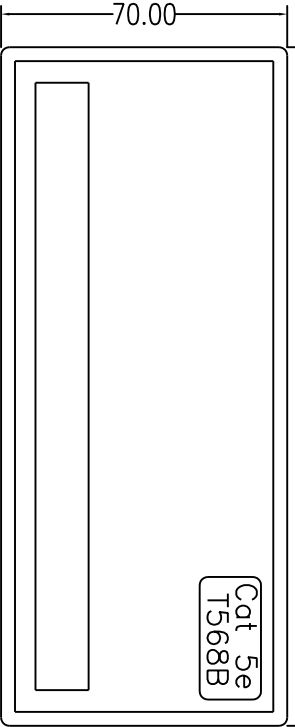


70.00

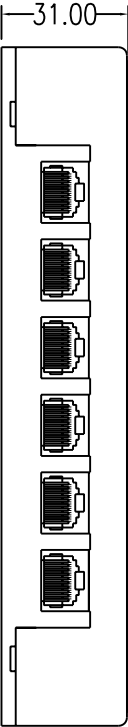


31.00



REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED
	1			
	2			
	3			

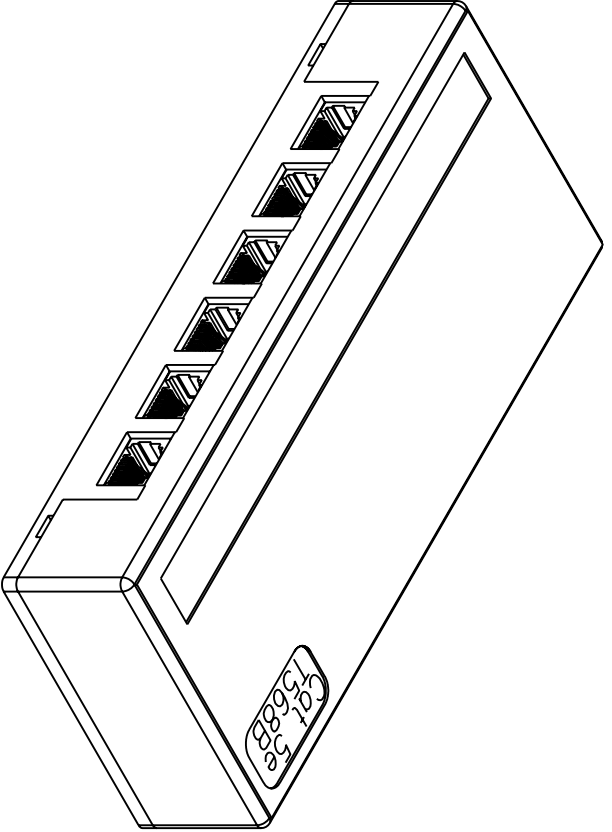

ENCLOSURE:
 K5 6 X 20mm SCREW X 2
 NYLON CABLE TIE X 2
 TWIN ADHESIVE X 1(55 X 15mm)



Cat 5e
 UL CERTIFIED
 ACCORDING TO TIA/EIA-568-B-2
 REQUIREMENTS
 FILE NO. E145249



MATERIAL
 Housing: ABS, UL 94V-0
 IDC plastic: PC, UL 94V-0
 IDC contact: Phosphor Bronze with 200u
 " Tin over 100u" Nickel undercoat
 Spring Wire: Phosphor Bronze with 50u
 " Gold over 100u" Nickel undercoat
 Temperature: -40°C ~ 70°C
 Humidity: 10% ~ 90% RH
 Modular jack: 750 mating cycles
 Idc block: 200 termination cycles
 SHIELDED: Bronze with Nickel plated.

ELECTRICAL
 Current rating: 1.5 Amps
 Insulation resistance: 500 MOhm
 Contact resistance: 20 mOhm
 DC resistance: 0.1 Ohm
 Dielectric withstanding voltage: 1000 V

COMMON TOLERANCE		SHEET	OF	ALL COPY RIGHTS RESERVED	
CLASS	A	SIZE	A4	DCE DAN-CHIEF ENTERPRISE CO., LTD.	
DIMENSION		DIA	mm	TITLE	
L <= 3	±0.05			6000-8-C5eB-XX	
3 < L <= 6	±0.05	SCALE	1:1	DRAWING NO.	AG-002-1
6 < L <= 16	±0.1			DRAWN	CHECKED
16 < L <= 30	±0.1	DATE	2002.04.01		
30 < L <= 120	±0.15				
120 < L <= 315	±0.2	DESIGN			