



RoHS COMPLIANT

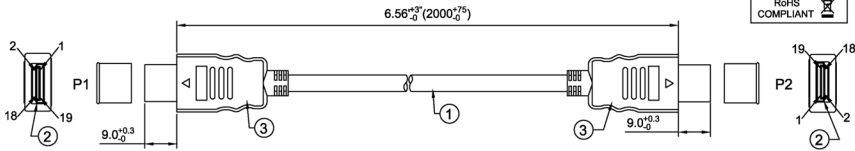

NOTE:  
 1. ELECTRICAL TEST: 100% OPEN, SHORT & MISS WIRE TEST.  
 CONDUCTOR RESISTANCE: 3 OHMS MAX.  
 INSULATION RESISTANCE: 10M OHMS MIN.  
 HI-POT: DC300V 0.01SEC.  
 2. PACKING:

ROUND CABLE METHOD SEE "DETAIL A"			
	BAG TYPE	QTY	LABEL
SMALL	POLYBAG	1 CABLE	NONE
LARGE	POLYBAG	ALL	NONE

EACH LARGE POLYBAG IN AN OUTER CARTON



PIN OUT			
P1	P2	P1	P2
HDMI M	HDMI M	HDMI M	HDMI M
1	1	13	13
3	3	15	15
2	2	16	16
4	4	17	17
6	6	19	19
5	5	18	18
7	7	14	14
9	9		
8	8		
10	10	Shell	Shell
12	12		
11	11		

3	25g	PVC-BK-50	OVER MOLD: BLACK PVC 50P, UL94V-0.
2	2SETS	HDMI-19MS	CONNECTOR: HDMI19P A MALE, SOLDER TYPE, GOLD PLATED 15u", NICKEL PLATED FULL SHELL
1	1PC	HDMI CABLE	CABLE: ((28AWGx1P+DRAIN+AL/MY)x4C+28AWGx1P+28AWGx5C)+AL/MY+BRAID, UL20276, BLACK PVC JACKET, OD=7.3±0.15mm.
ITEM	QTY	PART NO.	DESCRIPTION

PART LIST

Scale	X:X	All Copy Rights Reserved	
3rd Angle Projection			DAN-CHIEF ENTERPRISE CO., LTD.
Unit	mm	Title	
Date	2008/3/14	HD-HD-2M	
Tolerance			
~20	~50	~150	150~
±0.5	±1.5	±1.5	±2°
Drawn by		Checked by	
Joanne			