
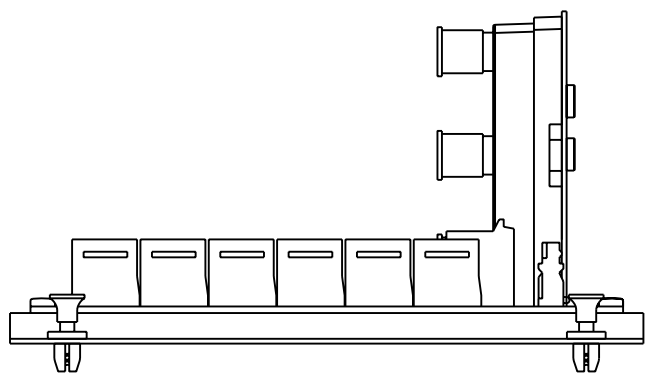
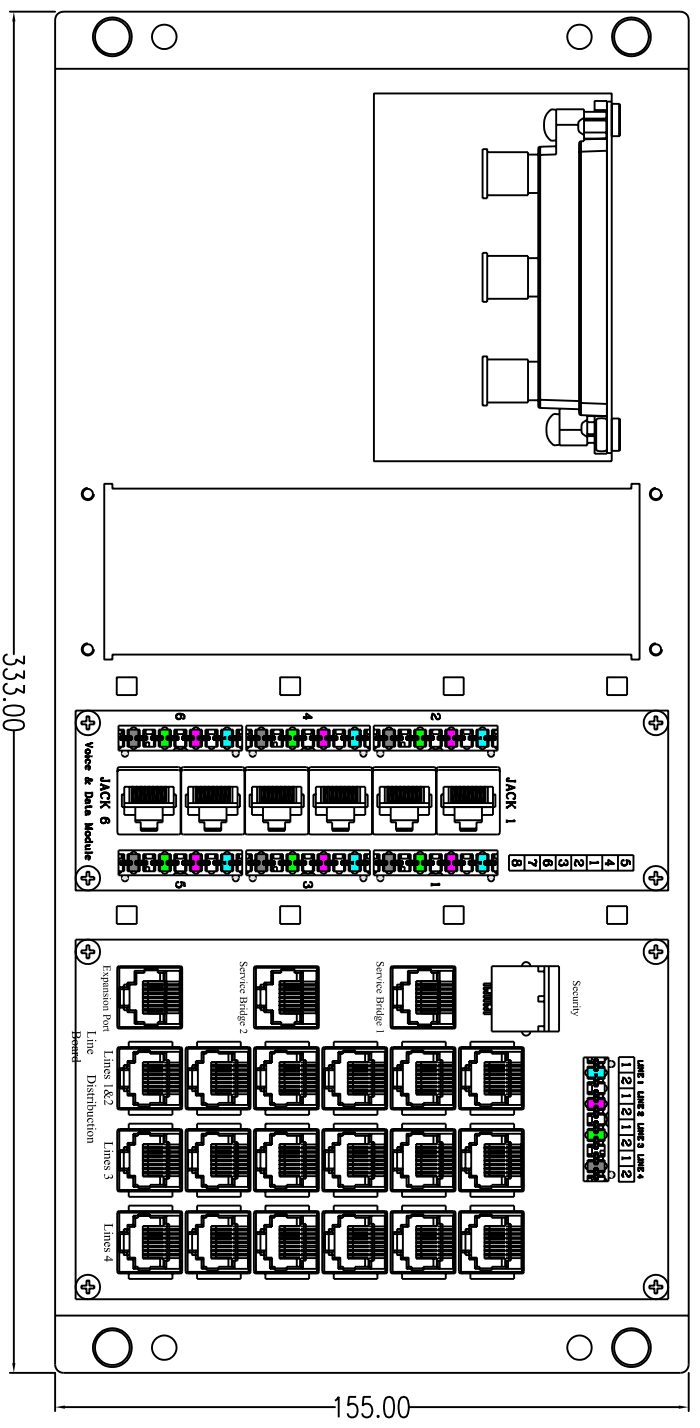
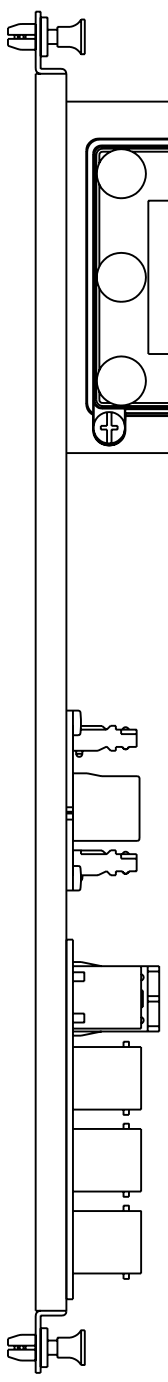


SPEC. FOR 6-WAY SPLITTER

PARAMETER	INSERTION LOSS IN-OUT (MAX, dB)		RETURN LOSS IN (MIN, dB)		RETURN LOSS OUT (MIN, dB)		ISOLATION OUT-OUT (MIN, dB)	
	5-1000 (MHz)	11.5	5-15	15-90	5-15	15-90	5-15	15-90
GMW/811400	200	200	200	200	200	200	250	250

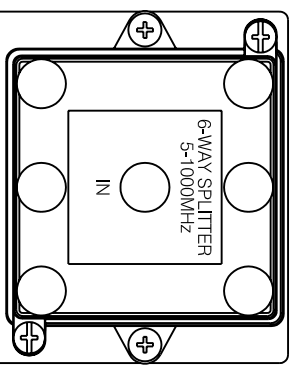

OPERATING CONDITION
 Temperature: -40°C ~ 68°C
 Humidity: 10%~90% RH

ELECTRICAL
 Current rating: 1.5A
 Voltage: 150V
 Insulation resistance: 500 MOhm
 Contact resistance: 20 MOhm
 DC resistance: 0.1 Ohm
 Dielectric withstanding voltage: 1000V

MATERIAL
 Metal Frame: SPCC(CR)
 Jack Housing: Dupont FR-50 Standard Material Glass Filled Polyester UL94V-0
 IDC plastic: PC, UL 94V-0
 IDC contact: Phosphor Bronze with 200u" Tin over 100u" Nickel undercoat
 PCB: FR-4
 Spring Wire: Phosphor Bronze with 50u" Gold over 100u" Nickel undercoat

COMMON TOLERANCE		SHEET OF		ALL COPY RIGHTS RESERVED	
CLASS	A	B	SIZE	A4	DCE DAN-CHIEF ENTERPRISE CO., LTD.
DIMENSION			DIA	mm	TITLE
L <= 3	±0.05	±0.1	SCALE	1:2	HMC5003
3 < L <= 6	±0.05	±0.1	DATE	2004.11.03	DRAWING NO. HMC-020
6 < L <= 16	±0.1	±0.15	DESIGN		DRAWN
16 < L <= 30	±0.1	±0.2			CHECKED
30 < L <= 120	±0.15	±0.3			
120 < L <= 315	±0.2	±1			

REVISIONS			
ZONE	REV	DESCRIPTION	DATE
	1		