
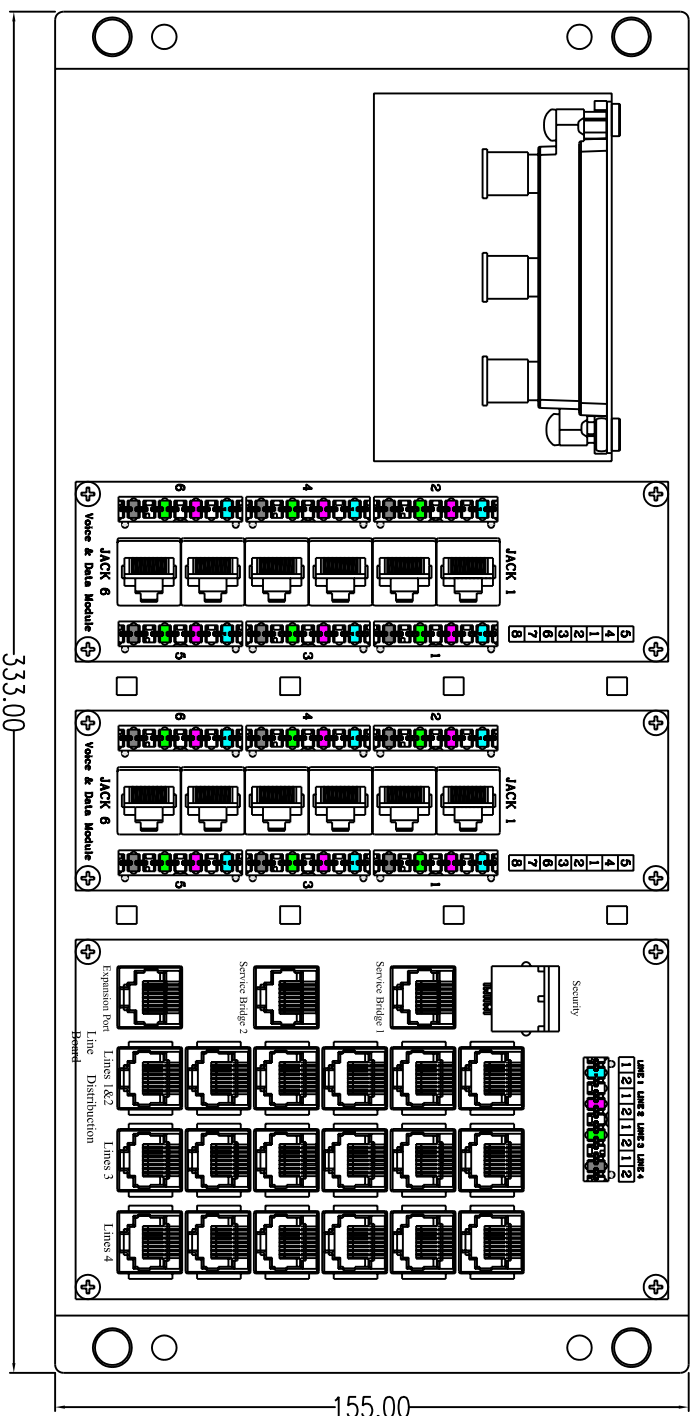
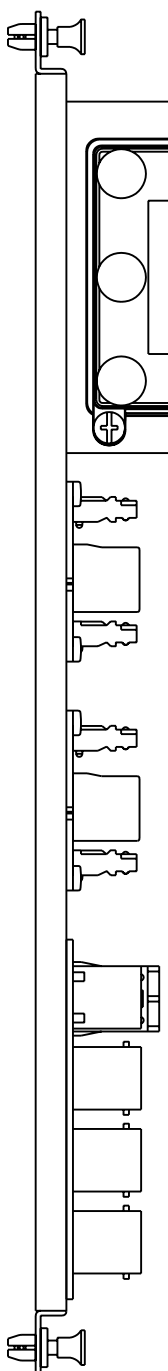



SPEC. FOR 6-WAY SPLITTER

PARAMETER	RETURN LOSS		RETURN LOSS		RETURN LOSS		ISOLATION	
	IN-OUT	(MIN,db)	IN	(MIN,db)	OUT	(MIN,db)	OUT-OUT	(MIN,db)
FREQUENCY RANGE (MHz)	5-1000	5-15	15-50	50-500	500-750	750-1000	5-15	15-50
6WAY 811400	11.5	20.0	20.0	22.0	20.0	20.0	20.0	22.0
		20.0	20.0	20.0	20.0	25.0	25.0	25.0
		25.0	25.0	25.0	25.0	25.0	25.0	25.0

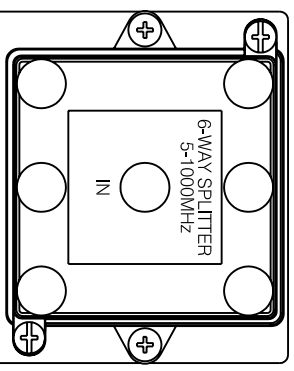

333.00

155.00

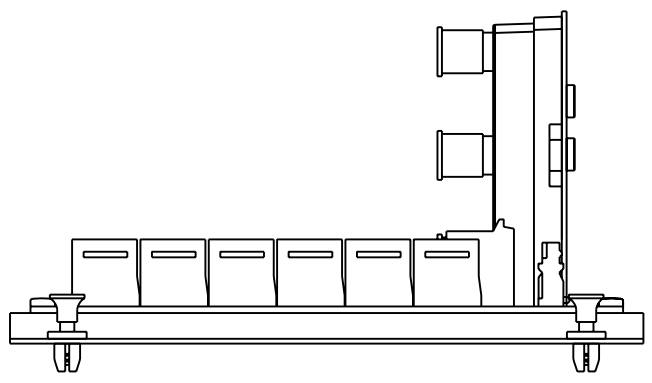

REVISIONS

ZONE	REV	DESCRIPTION	DATE	APPROVED
	A			

OPERATING CONDITION

Temperature: -40°C ~ 68°C
Humidity: 10%~90% RH

MATERIAL

Jack Housing: Dupont FR-50 Standard Material Glass Filled Polyester UL94V-0
IDC plastic: PC, UL 94V-0
IDC contact: Phosphor Bronze with 200u "Tin over 100u" Nickel undercoat
PCB: FR-4
Spring Wire: Phosphor Bronze with 50u "Gold over 100u" Nickel undercoat

ELECTRICAL

Current rating: 1.5A
Voltage: 150V
Insulation resistance: 500 MOhm
Contact resistance: 20 MOhm
DC resistance: 0.1 Ohm
Dielectric withstanding voltage: 1000V

COMMON TOLERANCE		SHEET	OF	ALL COPY RIGHTS RESERVED	
CLASS	A	SIZE	A4	DCE DAN-CHIEF ENTERPRISE CO.,LTD.	
DIMENSION		DIA	mm	TITLE	
L <= 3	±0.05			HMC5004	
3 < L <= 6	±0.05	SCALE	1:2	DRAWING NO.	HMC-021
6 < L <= 16	±0.1	DATE	2004.11.03	DRAWN	CHECKED
16 < L <= 30	±0.1				
30 < L <= 120	±0.15				
120 < L <= 315	±0.2	DESIGN			