
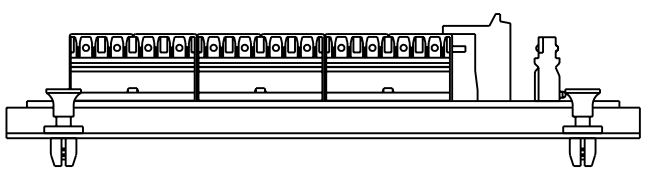


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED
	Δ			
	Δ			
	Δ			

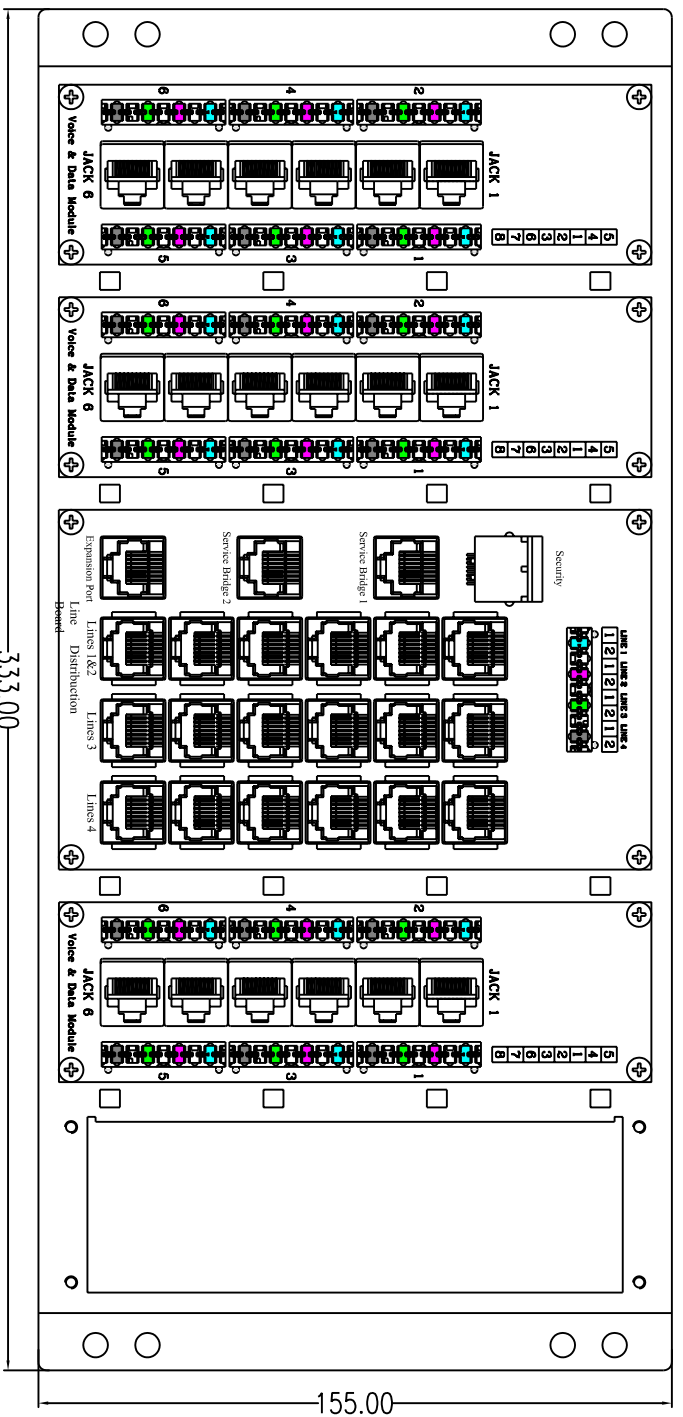

OPERATING CONDITION
 Temperature: -40°C ~ 68°C
 Humidity: 10%~90% RH

ELECTRICAL
 Current rating: 1.5A
 Voltage: 150V
 Insulation resistance: 500 MOhm
 Contact resistance: 20 MOhm
 DC resistance: 0.1 Ohm
 Dielectric withstanding voltage: 1000V

MATERIAL
 Metal Frame: SPCC(CR)
 Jack Housing: Dupont FR-50 Standard Material Glass Filled Polyester UL94V-0
 IDC plastic: PC, UL 94V-0
 IDC contact: Phosphor Bronze with 200u "Tin over 100u" Nickel undercoat
 PCB: FR-4
 Spring Wire: Phosphor Bronze with 50u "Gold over 100u" Nickel undercoat

COMMON TOLERANCE		SHEET	OF	ALL COPY RIGHTS RESERVED	
CLASS	A	SIZE	A4	DCE DAN-CHIEF ENTERPRISE CO.,LTD.	
DIMENSION	±0.05	DIA	mm	TITLE	
L <= 3	±0.1	SCALE	1:2	HMC5005	
3 < L <= 6	±0.05	DATE	2004.11.08	DRAWING NO.	HMC-023
6 < L <= 16	±0.1	DESIGN		DRAWN	CHECKED
16 < L <= 30	±0.1				
30 < L <= 120	±0.15				
120 < L <= 315	±0.2				