
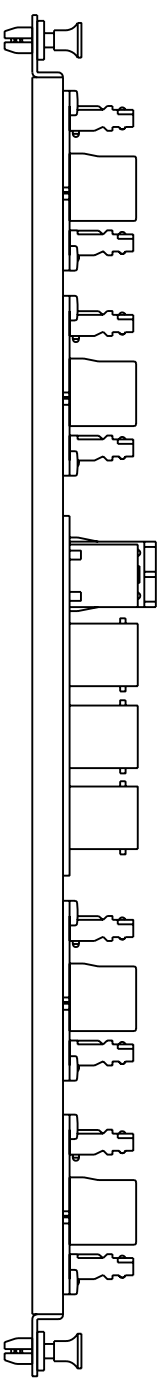
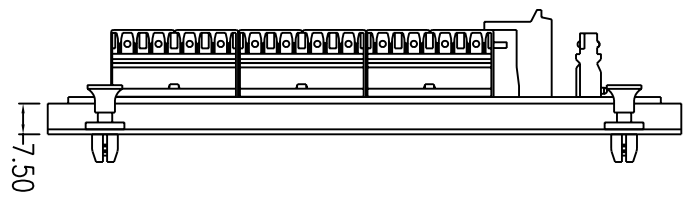


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED
	1			
	2			
	3			
	4			

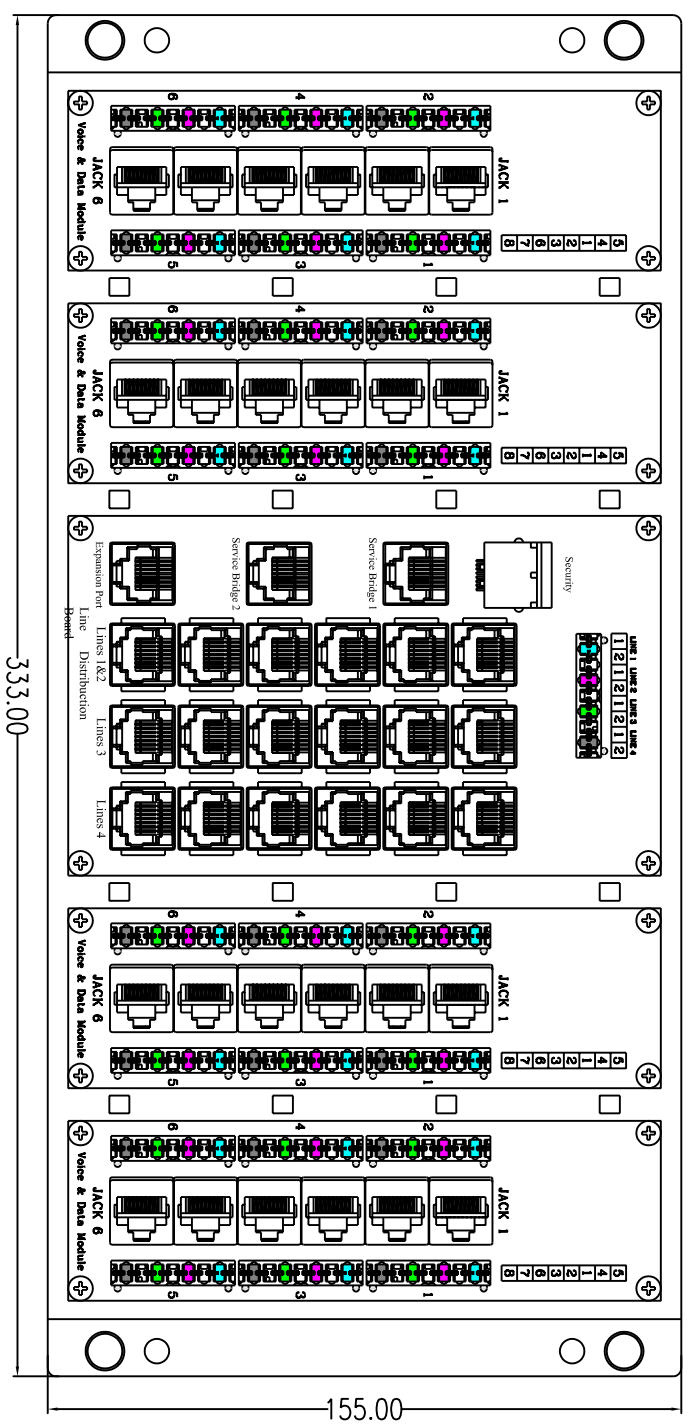

ELECTRICAL
 Current rating: 1.5A
 Voltage: 150V
 Insulation resistance: 500 MOhm
 Contact resistance: 20 MOhm
 DC resistance: 0.1 Ohm
 Dielectric withstanding voltage: 1000V

OPERATING CONDITION
 Temperature: -40°C ~ 68°C
 Humidity: 10%~90% RH

MATERIAL
 Metal Frame: SPCC(CR)
 Jack Housing: Dupont FR-50 Standard Material Glass Filled Polyester UL94V-0
 IDC plastic: PC, UL 94V-0
 IDC contact: Phosphor Bronze with 200u" Tin over 100u" Nickel undercoat
 PCB: FR-4
 Spring Wire: Phosphor Bronze with 50u" Gold over 100u" Nickel undercoat

COMMON TOLERANCE		SHEET	OF	ALL COPY RIGHTS RESERVED	
CLASS	A	B	SIZE	A4	TITLE
DIMENSION	±0.05	±0.1	DIA	mm	HMC5006
L <= 3	±0.05	±0.1	SCALE	1:2	
3 < L <= 6	±0.05	±0.1	DATE	2004.11.08	
6 < L <= 16	±0.1	±0.15	DRAWING NO.	HMC-024	
16 < L <= 30	±0.1	±0.2	DESIGN		CHECKED
30 < L <= 120	±0.15	±0.3			
120 < L <= 315	±0.2	±1			