
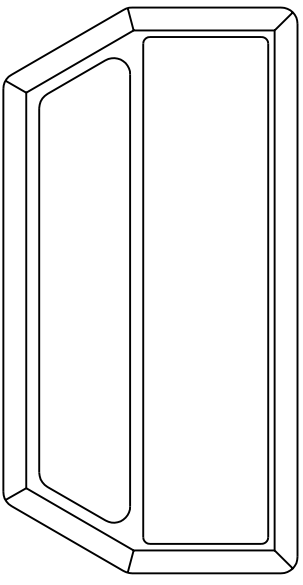
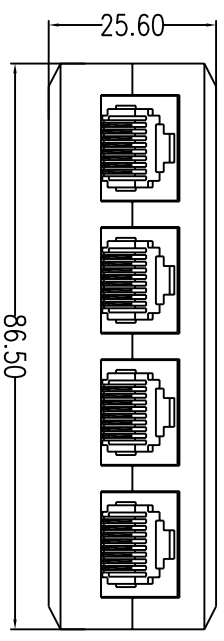

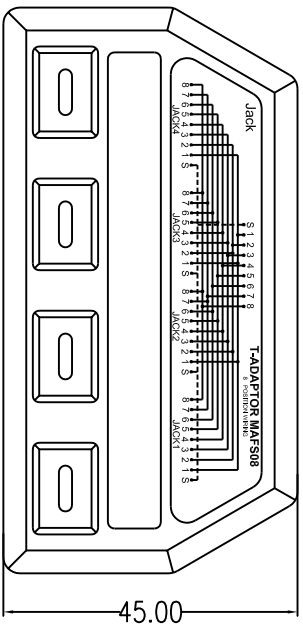



REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED
	1			
	2			
	3			

MATERIAL

Housing: ABS, UL 94V-0
 Spring Wire: Phosphor Bronze with 50u
 " Gold over 100u" Nickel undercoat
 Temperature: -40°C ~ 68°C
 Humidity: 10% ~ 90% RH
 Modular jack: 750 mating cycles
 Shield: Bronze over Nickel
ELECTRICAL
 Current rating: 1.5 Amps
 Insulation resistance: 500 MOhm
 Contact resistance: 20 mOhm
 DC resistanc: 0.1 Ohm
 Dielectric withstanding voltage: 1000 V

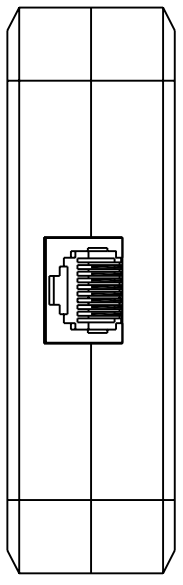

ENCLOSURE: ICON PC (BLUE) X 4
 ICON TEL (GREEN) X 4

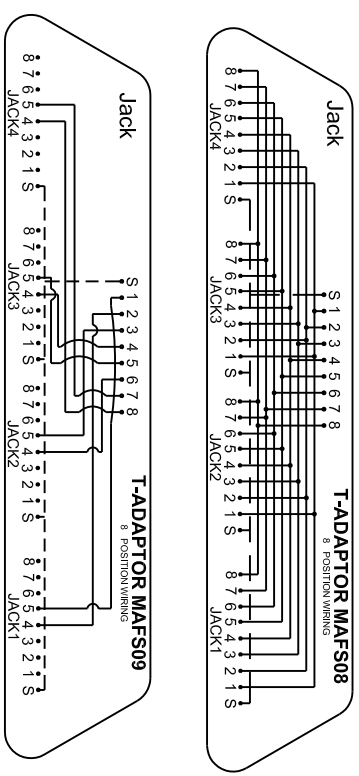

COMMON TOLERANCE		SHEET	OF	ALL COPY RIGHTS RESERVED	
CLASS	A	SIZE	A4	 DAN-CHIEF ENTERPRISE CO., LTD. MAFU-Series	
DIMENSION	L<=3	DIA	mm		
	3<L<=6	SCALE	4:5		
	6<L<=16	DATE	2004.07.20		
	16<L<=30	SCALE	4:5	DRAWING NO.	C-056
	30<L<=120	DATE	2004.07.20	DRAWN	CHECKED
	120<L<=315	SCALE	4:5	DESIGN	