



REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED
	A			

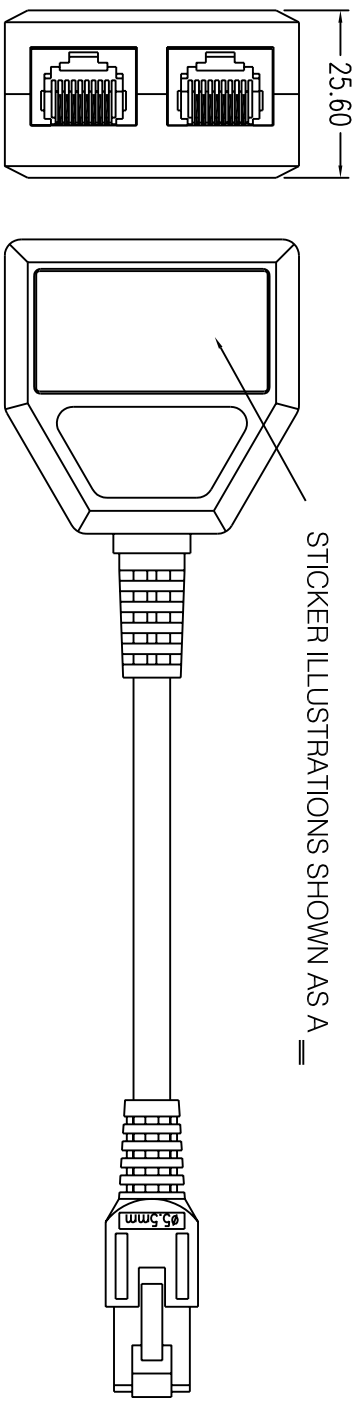

**MATERIAL**  
Housing: ABS, UL 94V-0  
Spring Wire: Phosphor Bronze with 50u  
" Gold over 100u" Nickel undercoat  
Temperature: -40°C ~ 68°C  
Humidity: 10% ~ 90% RH  
Modular jack: 750 mating cycles

**ELECTRICAL**  
Current rating: 1.5 Amps  
Insulation resistance: 500 MOhm  
Contact resistance: 20 mOhm  
DC resistance: 0.1 Ohm  
Dielectric withstanding voltage: 1000 V

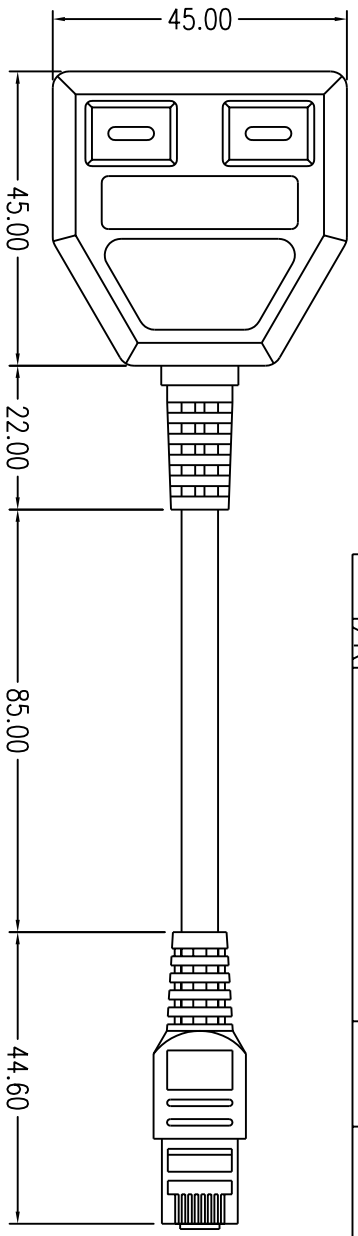

ENCLOSURE:  
ICON PC (BLUE) X 2  
ICON TEL (GREEN) X 2

COMMON TOLERANCE	SHEET	OF	ALL COPY RIGHTS RESERVED
CLASS A	SIZE	A4	<b>DCE</b> DAN-CHIEF ENTERPRISE CO., LTD.
DIMENSION L <= 3	DIA	mm	TITLE
3 < L <= 6	SCALE	1:1	T-ADAPTOR MAUXX
6 < L <= 16	DATE	2005.01.28	DRAWING NO.
16 < L <= 30	DESIGN		C-001
30 < L <= 120	CHECKED		
120 < L <= 315			